



Greentek
Home Ventilation Systems

You need fresh air, so does your home.



Greentek Peace of Mind

All Greentek products are backed by the best limited warranty in the industry, for your peace of mind.

You benefit from a lifetime warranty on the core, a 10-year warranty on our ventilation motors and a 5-year warranty on all other components. So you can breathe easy.

Heat Recovery Ventilator XDH 7.15





Greentek

Features & Benefits



DuoTrol
balancing system
Silent and economical...
By reducing motor speed to
balance the unit, you avoid the
noise that would be produced

by balancing dampers. In addition, with this
technology the unit will consume
less energy.



Balancing Pressure Taps
Quick and easy integrated
balancing pressure taps
located in the access door
allows for accurate readings
and maximizing your balanced

ventilation requirements.



ISF
6" (diam.) collar system
Quick and simple to install
thanks to our revolutionary
"Insert Slide and Fix" collar
system. The "ISF" 6" (diam.)

collar system enables you to manipulate duct within
your reach and then insert by sliding it in place, for a
better and quicker installation.



Range of controls
*For optimal performance of your
HRV/ERV system.*

The entire range of controls is
offered with features making
your ventilation system simple,

easy to operate and backed by a 5-year limited warranty.
Choose from: EHC1.5, EHC1.0, RD-1, RD-2, RD-3P, RD-
4P and T-3 (*Push-Button Timer*)




Engineered motors
All Greentek products
are designed with high-
performance and reliable
motors for your comfort
and peace of mind. Factory

sealed and dynamically balanced, our motors are
maintenance-free for years to come.


Advanced 5th Port Defrost Sequence

This option enables the unit to have an auxiliary air supply by recirculating already-heated ambient air from a selected area and distributes throughout your home.

Continuous Ventilation Mode

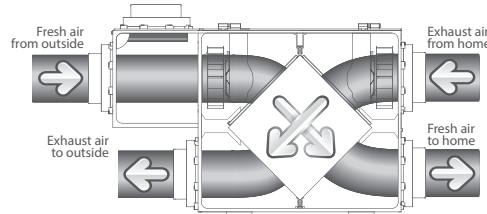


Advanced Defrost Sequence / Recirculating Mode

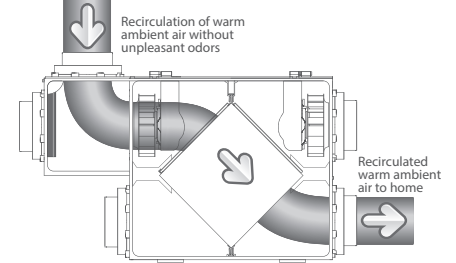

Ventilation Performance XDH 7.15

External Static Pressure	Net Supply Air Flow		Gross Air Flow Supply		Gross Air Flow Exhaust		
	Pa	in. wg	L/s	CFM	L/s	CFM	
25	0.1	77	163	78	165	85	180
50	0.2	70	148	71	150	80	170
75	0.3	64	136	65	138	73	155
100	0.4	57	121	58	123	67	142
125	0.5	50	106	50	106	59	125
150	0.6	44	93	44	93	51	108
175	0.7	36	76	36	76	44	93




This product earned the ENERGY STAR® by meeting strict energy efficiency guidelines set by Natural Resources Canada and the US EPA. It meets ENERGY STAR® requirements only when used in Canada.

Energy Performance XDH 7.15

	Supply Temperature		Net Air Flow		Power Consumed	Sensible Recovery Efficiency	Adjusted Sensible Recovery Efficiency
	°C	°F	L/s	CFM	Watts	SRE %	ASRE %
HEATING	0	32	30	64	52	71	76
	0	32	40	85	60	68	73
	0	32	50	106	72	65	69
	-25	-13	32	68	59	64	67

Specifications XDH 7.15

Size	31¾" x 21½" x 11⅝"
Weight	56 lbs (25 Kg)
CFM	30 to 150
Type of heat exchanger	Cross-flow (Polypropylene)
Exchange surface	104 ft²
Voltage	120 VAC @ 60 Hz
Amperage	1.0 A
Defrost type	Recirculation
Certification	HVI, cCSA _{US} , Energy Star®

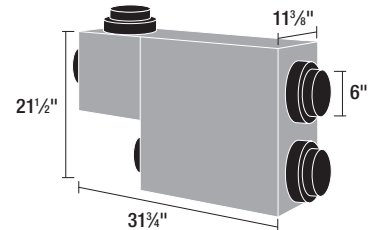

Greentek
50 Kanalfakt Way, Bouctouche,
NB Canada E4S 3M5
Toll free: 1 888 724-5211
Fax: 1 (866) 426-7430
Visit us at: www.greentek.ca



You can find Greentek Indoor Air Quality products at the following distributor:



Greentek reserves the right to modify a product, without prior notice, whether in design, colour or specifications, in order to offer at all times a quality product that is highly competitive. Please consult your national and local building codes to find out whether the installation of electrical products requires the services of a certified technician or electrician. Greentek™ is a registered Trademark used under license by Systemair Inc. All rights reserved.