


# ENGINEERING DATA

## PH 7.15 ES HRV model

Heat Recovery Ventilator

30 CFM (14 L/s) to 150 CFM (71 L/s)

Item No. 463016 (PH 7.15 ES Greentek)

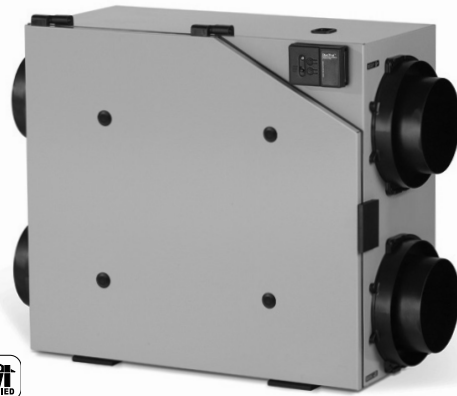

### FEATURES

- 3 operating modes (Intermittent, Continuous & High)
- 100% variable speed
- Integrated door pressure balancing taps
- ISF™ 6" (152.5 mm) dia. collar system
- Proportional defrost sequence
- SPM™ Single Person Mounting system
- Permanent lubrication PSC motors

### APPLICABLE REQUIREMENTS

- HVI Certified
- CSA C439 Standard - Packaged Heat/Energy Recovery Ventilators (HRV/ERV)
- CSA Standard CSA 22.2 N<sup>o</sup>.113 - Fans and ventilators
- UL Standard 1812. Ducted Heat/Energy Recovery Ventilators (HRV/ERV)
- ENERGY STAR®, SRE, TRE and fan efficacy minimum requirements

### OPTIONAL ACCESSORIES

- MERV 8 Inline 6" (152.5 mm) filter box
- R-2 Style high performance supply & exhaust ventilation hoods

### CABINET

- 22 gauge galvanized pre-painted steel corrosion resistant
- Cabinet liner: Molded Expanded Polystyrene (EPS)  
Rated UL94 HF-1

### ELECTRONIC COMPONENTS

- Electrical Input Voltage: 120 VAC/60Hz / 1-Phase.
- Electrical Input Current: 1.0 Amps Max
- Circuit output voltage: 5VDC nominal
- Integrated auxiliary furnace interlock relay
- RoHs compliant

### MOTORS

- Two permanent sealed, lubricated variable speed PSC Motors. (Maintenance free)
- Maximum RPM 2630 / Horsepower; 3/32 HP. Class F, thermally protected
- CSA 22.2 #113-10, clause 8.3.5  
– Backup protection – totally enclosed motor

### POLYPROPYLENE HRV CORE

- Dimensions 12"x 12"x 10" depth (304.8 mm x 304.8 mm x 254 mm)
- Corrugated cross-flow polypropylene layers, rated UL94 HB & HF-1
- Cross-flow that transfers sensible heat
- Endure harsh temperatures; effective in cold climates
- Water washable

### DUOTROL™ BALANCING SYSTEM

- The system is balanced by adjusting each motor independently
- No balancing dampers required
- Connection terminals for optional wall controls
- Quiet and energy efficient

### DEFROST

- Advanced Proportional supply fan shut down defrost sequence
- Defrost type: Evacuation  
Activated automatically at -5°C (23°F)

### DUCT CONNECTIONS

- Insert Slide & Fix (ISF™), removable collars system
- Four (4) 6" (152.5 mm) dia. round double collar.

### MOUNTING

- Adjustable mounting strap system


### FILTERS

- Two (2) Fiberbond washable - 11<sup>1</sup>/<sub>16</sub>" x 9<sup>3</sup>/<sub>16</sub>" x 5<sup>1</sup>/<sub>8</sub>" (297 mm x 248 mm x 15.9 mm)
- UL Class 2

### WARRANTY

- 10 year limited warranty on motors
- 5 year limited warranty on parts
- Lifetime limited warranty on Heat Recovery Core

### AIRFLOW

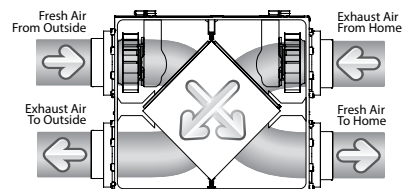

Greentek  
50 Kanafakt Way,  
Bouctouche, NB Canada E4S 3M5

Toll free: 1 888 724-5211  
Fax: 1 (866) 426-7430

Visit us at: [www.greentek.ca](http://www.greentek.ca)

463684 / APRIL2022



Greentek reserves the right to modify a product, without prior notice, whether in design, colour or specifications, in order to offer at all times a quality product that is highly competitive. Please consult your national and local building codes to find out whether the installation of electrical products requires the services of a certified technician or electrician. Greentek™ is a registered Trademark used under license by Systemair Inc. All rights reserved.

# ENGINEERING DATA PH 7.15 ES HRV

## SPECIFICATIONS PH 7.15 ES HRV


<b>Dimensions</b>	29½" x 22½" x 11½" (749.3 mm x 571.5 mm x 289 mm)
<b>Duct Connections</b>	Four (4) 6" (152.5 mm) dia. ISF double collar system
<b>Airflow Rates</b>	30 CFM (14 L/s) to 150 CFM (71 L/s)
<b>Motor</b>	Two (2) PSC variable speed backward curved
<b>Voltage</b>	120 VAC @ 60 Hz / 1 Phase
<b>Amperage</b>	1.0 A / 100 watts
<b>Type of heat exchanger</b>	Cross-flow polypropylene
<b>Exchange surface</b>	85 ft² (7.9 m²)
<b>Defrost type</b>	Evacuation
<b>Filters</b>	Two (2) Fiborbond washable
<b>Drain Connection</b>	½" (12.7 mm)
<b>DuoTrol</b>	Integrated Balancing System
<b>Actual Weight</b>	43.5 lbs (19.7 Kg)
<b>Shipping Weight</b>	49 lbs (22.2 Kg)
<b>Certification</b>	HVI, cCSAUS, CSA 22.2 N <sup>o</sup> .113 Complies with UL 1812

## OPTIONAL WALL CONTROLS


<b>Digital</b>	EHC1.0TC and EHC1.5DC
<b>Mechanical</b>	RD-1, RD-2, RD-3P and RD-4P
<b>Timers</b>	T3 (20, 40, 60 minutes)

## WALL CONTROL DIMENSIONS


### EHC1.0 & EHC1.5




### Mechanical




### T3 Timer



## DIMENSIONS DATA

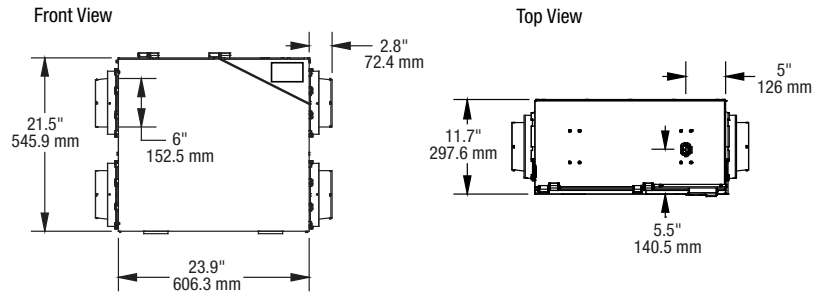


## MINIMUM CLEARANCE DATA

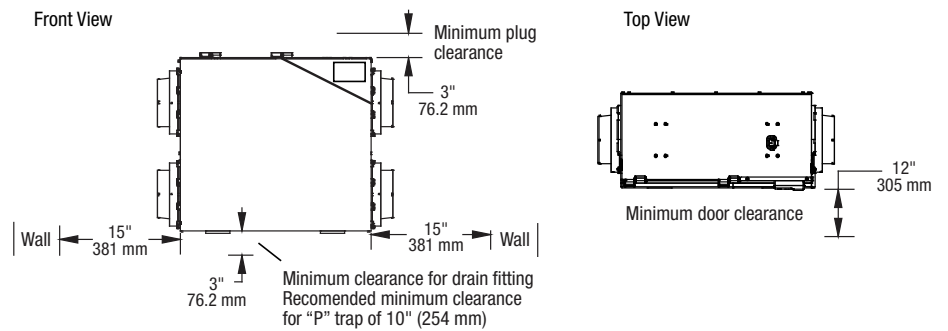

## VENTILATION PERFORMANCE

External Static Pressure Pa	Net Supply Air Flow		Gross Air Flow Supply		Gross Air Flow Exhaust		
	in. wg	L/s	CFM	L/s	CFM	L/s	CFM
25	0.1	71	150	72	153	80	170
50	0.2	64	136	65	138	73	155
75	0.3	58	123	58	123	66	140
100	0.4	52	110	52	110	59	125
125	0.5	47	100	47	100	52	110
150	0.6	40	85	41	87	47	100
175	0.7	33	70	33	70	40	85



This product earned the ENERGY STAR® by meeting strict energy efficiency guidelines set by Natural Resources Canada and the US EPA. It meets ENERGY STAR® requirements only when used in Canada.

## ENERGY PERFORMANCE

	Supply Temperature		Net Air Flow		Power Consumed	Sensible Recovery	Adjusted Sensible
	°C	°F	L/s	CFM	Watts	Efficiency (SRE %)	Recovery Efficiency (ASRE %)
<b>HEATING</b>	0	32	30	64	52	70	76
	0	32	40	85	64	65	71
	0	32	50	106	78	64	69
	-25	-13	33	70	51	60	62

Quoted by:	Date:
Project:	Remarks:
Quantity:	
Model:	
Site:	
Architect:	
Engineer:	
Contractor:	