

Submittal Sheet

Literature item #: 486672
Rev Date: 2024-12-12


PROFILE 1.2E-D-M-HC

Fresh Air Appliance (FAA/ERV)

Product #: 499515



PROFILE **1.2** **E** - **D** - **M** - **HC**
 Product Name 120 CFM Energy Damper Mirrored Hard Connect
 @ 0.4 in. Recovery w.g.

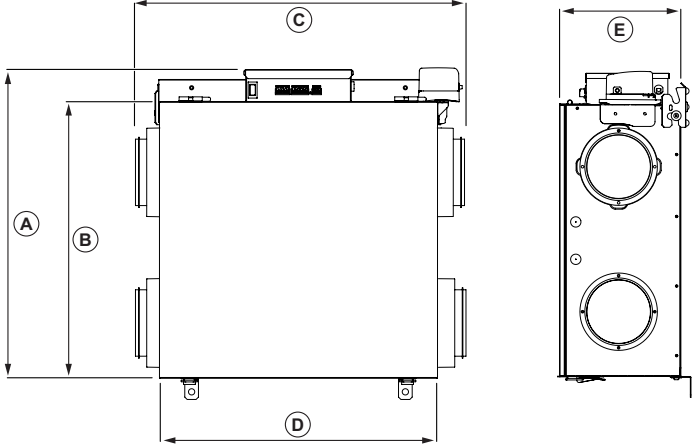

| A | | B | | C | | D | | E | |
|---------|-----|--------|-----|----|-----|----------|-----|-------|-----|
| in | mm | in | mm | in | mm | in | mm | in | mm |
| 23 5/32 | 588 | 20 3/4 | 527 | 25 | 636 | 20 27/32 | 529 | 9 1/4 | 235 |

Clearances:
 8 1/2 in. (216 mm.) in front of the product for removal of core.
 2 3/8 in. (61 mm.) above the electrical box to do the wire connections.

STANDARD FEATURES

- Hard-connect system, no power cord provided
- Warm supply and return air on the left-hand side
- Average airflow: 127 cfm (60 L/s) @ 0.4 in. wg (100Pa)
- Compact design: 25 in. x 9 1/4 in. x 23 5/32 in. (636 mm x 235 mm x 588 mm)
- Lightweight: 35 lbs (16 kg) including core
- Mechanical shutoff damper
- Easy to install on ceiling or wall with mounting bracket included
- Energy recovery core
- Electrostatic filters (washable)
- No drain required
- Removable screw terminal for easy connection with external access
- Multiple speed operation

| Fan Specifications | | | | | | | Motor Specifications | | | | |
|--------------------|-----|-----------|-----|-----|----|---------|----------------------|-------|-------|-------|------------------|
| Line | Qty | Model No. | Tag | CFM | SP | Fan RPM | Watts | Volts | Phase | Hertz | Insulation Class |
| 1 | | | | | | | | | | | A |
| 2 | | | | | | | | | | | A |
| 3 | | | | | | | | | | | A |

| Accessory Items | | | | 1 | 2 | 3 | 4 | Accessory Items | | | | 1 | 2 | 3 | 4 |
|-----------------|--|--|--|---|---|---|---|-----------------|--|--|--|---|---|---|---|
| | | | | | | | | | | | | | | | |

Project: _____ Submitted: _____
 Customer: _____ Approved: _____
 Location: _____

